GUARDIAN RFID (G1 Series)
Electronic Hotel Lock

Be-Tech GUARDIAN RFID G1 Series is the luxury version of GUARDIAN RFID G0 Series, and offers a better looking of outside escutcheon and handles for hotel choice.

Be-Tech GUARDIAN RFID G1 Series offers the same performance as GUARDIAN RFID G0 Series but with whole series international certifications to enhance guest's confidence.

Be-Tech GUARDIAN RFID G1 Series is equipped with the most flexible platform for future All-in-one card applications.




Features:

- Stand alone electronic lock with RFID technology.
- Fire Listed for usage on fire doors (EN).
- High security stainless steel mortise lockcase available in ANSI, AUS and EURO versions.
- Die-Casting handle with long lasting painting finish.
- 3-point stainless steel latch construction with antifriction mechanism.
- Mortise equipped 20mm throw high strength deadbolt.
- Panic release function - the deadbolt and latch are automatically retracted by inside handle for easy regress in emergency situation.
- ADA compliant (guest with physical disabilities).
- Future proof re-programmable FLASH RAM lock memory.
- Powered by four AA batteries that provide up to 1 year normal life time.
- 414 events audit trail.
- Compatible with BIS HOTEL software platform.
- High security mechanical override cylinder available.
- Optional No.36 stainless steel handle.
- Compatible hotel function and residential function.

RFID Specifications:

- 13.56MHz technology
- Compatible with the following standard
  : ISO 14443 A (MIFARE Classic)
- Eleven free sectors for future All-in-one card application use

Dimensions:

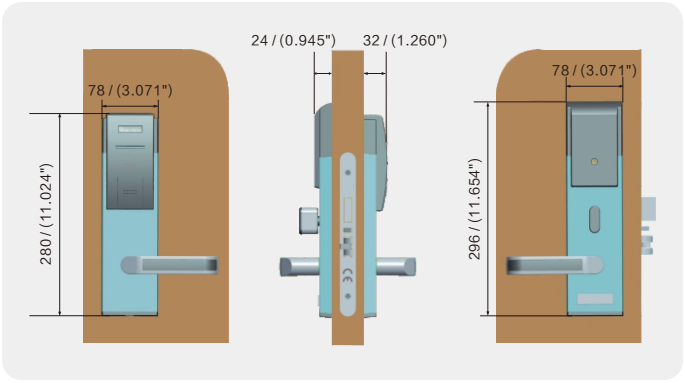


BE-TECH

Focus on Smart Lock Since 1992.


Technical Data:

Power	4 x 1.5V AA alkaline batteries
Battery Location	Inside of the back lock
Material	Handles: Stainless steel quality SUS304 Lock body: Stainless steel quality SUS304
Metal Finishes	Silver, Gold, Matte Black
Emergency Opening Options	Emergency Opening with Mechanical cylinder
Locking Mechanism	Electro-mechanical locking mechanism
Door Thickness	35-80mm (only for EURO mortise)
System Software Compatibility	BIS Hotel
Storage Temperature	Workable -20˚C~60˚C: non-condensing environment
Tested Operating Temperature	Tested from -25˚C~70˚C
Certifications	Approved according to EN14846. Fire approved according to EN 1634-1 Fire approved according to UL(timber doors)
Supported RFID Standard	ISO 14443 A (MIFARE Classic)

ANSI Lockcase

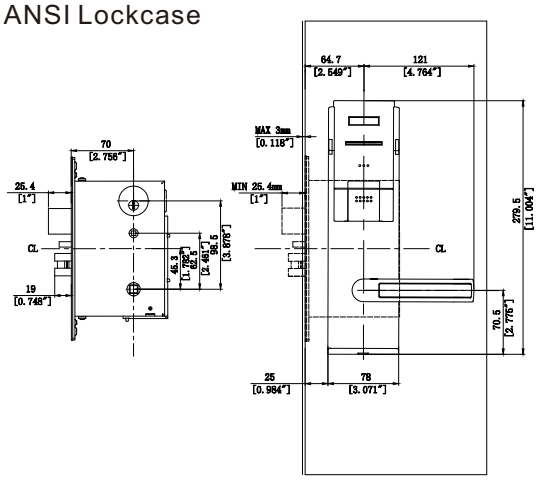


AUS Lockcase

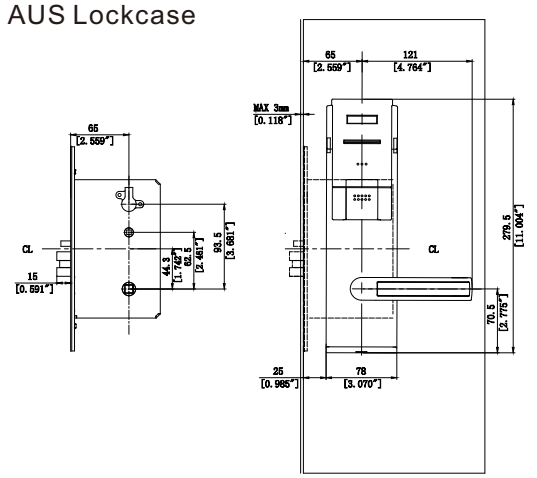

Lockcase Dimensions:

ANSI Lock Case Variants	ANSI DA
ANSI Lock Case Widths	28mm / 1.10 inches 31.5mm / 1.24 inches
ANSI Backset	70mm / 2.76 inches
EURO Lock Case Variants	EURO DA, available in: Australia version(AUS) Japan version(JPN)
EURO Lock Case Widths	22mm / 0.87 inches
EURO Backsets	65mm / 2.56 inches

EURO Lockcase

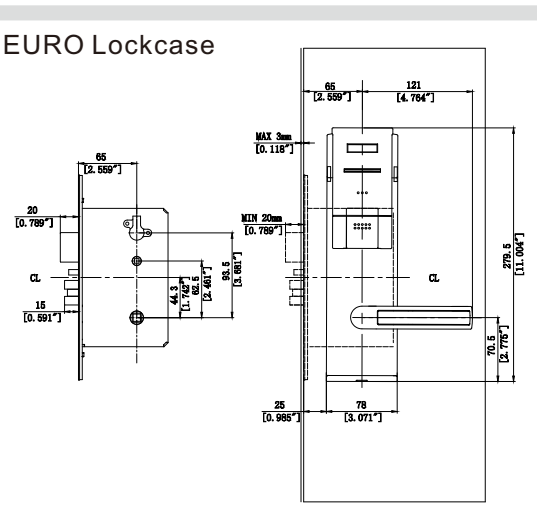

Guangdong Be-Tech Security Systems Limited
No.17, Ronggui Technology Industrial Park
Keyuan 3rd Road, Shunde, Foshan
Guangdong, P.R.China
Tel:+86 757 28376123 | Fax:+86 757 28308823
E-mail:export@be-tech.com.cn | www.betechlock.com

Specifications may change without notice.

ID: 04-BTMA42C1903-E1-07