

## VISUAL III RFID (V5 Series) Electronic Hotel Lock

**Be-Tech VISUAL III RFID** series is the latest electronic locks that use simple, fashionable and comfortable design.

**Be-Tech VISUAL III RFID** series is especially designed for the modern and fashionable hotels with the desire of making sure the lock perfectly blends into the fashionable hotel environment.

"The sparkling bright spot, Not just the looks". With the combination of **Be-Tech VISUAL III RFID** series matte black finish, it allows architects and designers maximize hotel's fashion sense and enhance user experience to a new level.

### Features:


- Stand alone electronic lock with RFID technology.
- High security stainless steel mortise lockcase available in ANSI, AUS and EURO versions.
- 3-point stainless steel latch construction with antifriction mechanism.
- Mortise equipped 20mm throw high strength deadbolt.
- Panic release function - the deadbolt and latch are automatically retracted by inside handle for easy regress in emergency situation.
- ADA compliant (guest with physical disabilities).
- Future proof re-programmable FLASH RAM lock memory.
- Powered by four AA batteries that provide up to 1 year normal life time.
- 1000 events audit trail.
- Compatible with BIS HOTEL software platform.
- High security mechanical override cylinder available.



### RFID Specifications:

- 13.56MHz technology
- Compatible with the following standard : ISO 14443 A (MIFARE Classic)
- Ten free sectors for future All-in-one card application use

### Dimensions:

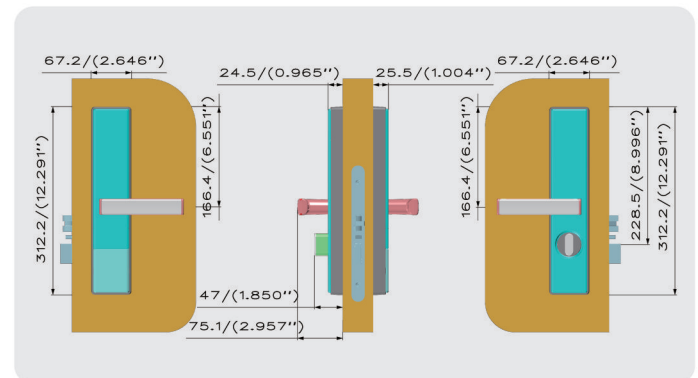

VISUAL III RFID series is not suitable for outdoor.




Your Hospitality Partner  
Leading Keyless Solutions Since 1992


## Technical Data:

Power	4 x 1.5V AA alkaline batteries
Battery Location	Inside of the back lock
Material	Handles: Aluminium Alloy Lock body: Aluminium Alloy
Metal Finishes	Matte Black
Emergency Opening Options	Emergency Opening with Mechanical cylinder
Locking Mechanism	Electro-mechanical locking mechanism
Door Thickness	35-80mm (only for EURO mortise)
System Software Compatibility	BIS Hotel
Storage Temperature	Workable -20°C~80°C: non-condensing environment
Tested Operating Temperature	Tested from -25°C~70°C
Supported RFID Standard	ISO 14443 A (MIFARE Classic)

ANSI Lockcase

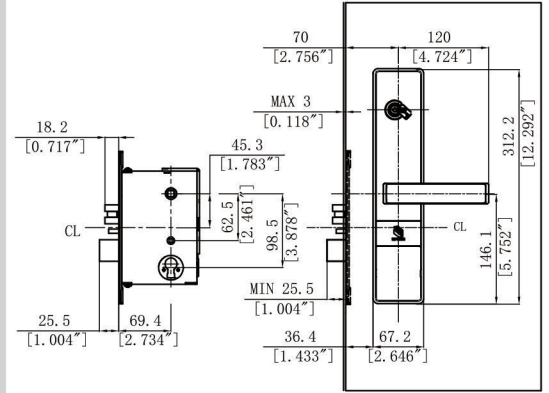

AUS Lockcase

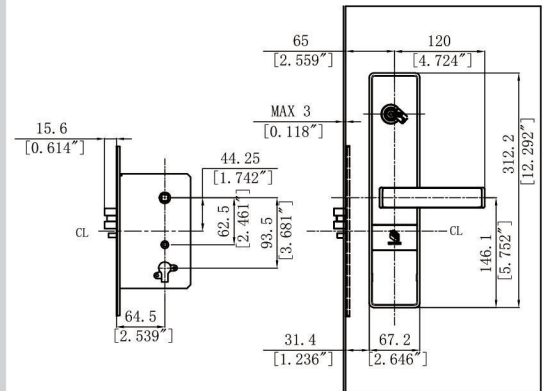

## Lockcase Dimensions:

ANSI Lock Case Variants	ANSI DB
ANSI Lock Case Widths	28mm / 1.10 inches 31.5mm / 1.24 inches
ANSI Backset	70mm / 2.76 inches
EURO Lock Case Variants	EURO DB, available in: Australia version(AUS)
EURO Lock Case Widths	22mm / 0.87 inches
EURO Backsets	65mm / 2.56 inches

EURO Lockcase

