


Multi-Channel Control Power Switch (8602 Series)

Control Box


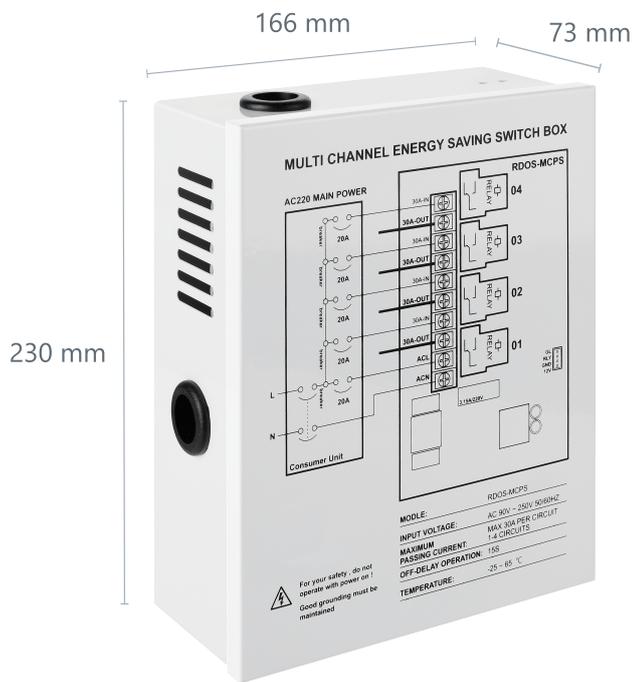


RDOS-MCPS


Voltage	90~250V AC 50/6Hz
Load Control	1-4 Routes \leq 30A/Route
Control Mode	Open / Close
Delay Off	15 Sec
Temperature	-25C~65C
Standby Power Consumption	3W

Control Unit

8602A 1: White (Default)
2: Black

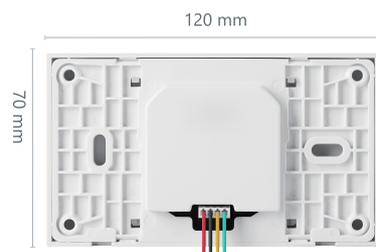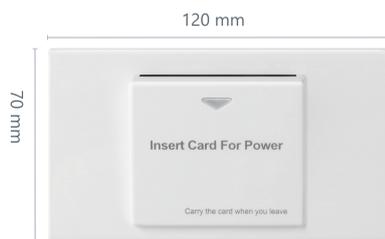

8602B 1: White (Default)
2: Black




BE-TECH

Your Hospitality Partner
Leading Keyless Solutions Since 1992

Feature:

- Four routes of 30A large load output control, wider use scenarios.
- Equipped with relay protection function, the product has a longer service life.
- After unplugging the card, there is a 15 second power outage delay, with a more user-friendly design.
- V0 level flame retardant material ensures safer product use.
- Multiple work mode options, with room number recognition and identity card recognition.
- Four routes output can be personalized to meet more scene requirements.
- The strong current box and weak current control unit work in different zones.
- Mobile App Setting.

Application:

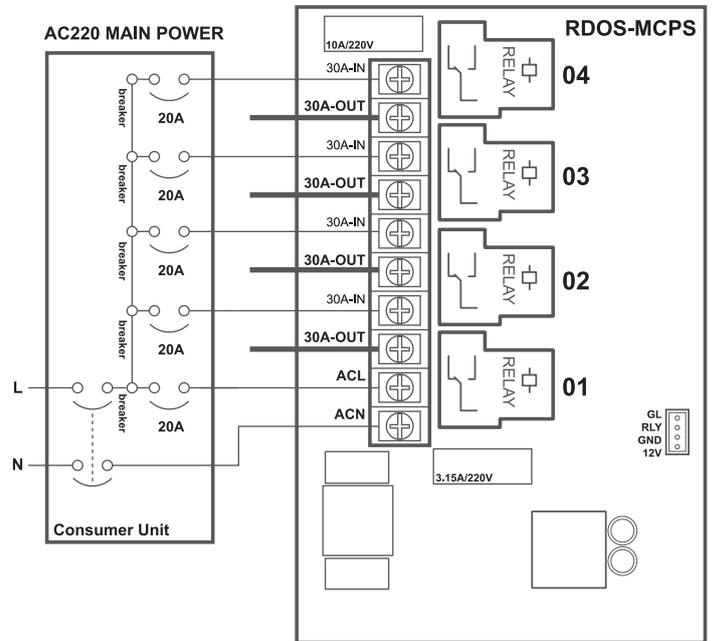

Wiring Diagram:

